

1977-1978
 1978-1979
 1979-1980
 1980-1981
 1981-1982
 1982-1983
 1983-1984
 1984-1985
 1985-1986
 1986-1987
 1987-1988
 1988-1989
 1989-1990
 1990-1991
 1991-1992
 1992-1993
 1993-1994
 1994-1995
 1995-1996
 1996-1997
 1997-1998
 1998-1999
 1999-2000
 2000-2001
 2001-2002
 2002-2003
 2003-2004
 2004-2005
 2005-2006
 2006-2007
 2007-2008
 2008-2009
 2009-2010
 2010-2011
 2011-2012
 2012-2013
 2013-2014
 2014-2015
 2015-2016
 2016-2017
 2017-2018
 2018-2019
 2019-2020
 2020-2021
 2021-2022
 2022-2023
 2023-2024
 2024-2025
 2025-2026
 2026-2027
 2027-2028
 2028-2029
 2029-2030
 2030-2031
 2031-2032
 2032-2033
 2033-2034
 2034-2035
 2035-2036
 2036-2037
 2037-2038
 2038-2039
 2039-2040
 2040-2041
 2041-2042
 2042-2043
 2043-2044
 2044-2045
 2045-2046
 2046-2047
 2047-2048
 2048-2049
 2049-2050
 2050-2051
 2051-2052
 2052-2053
 2053-2054
 2054-2055
 2055-2056
 2056-2057
 2057-2058
 2058-2059
 2059-2060
 2060-2061
 2061-2062
 2062-2063
 2063-2064
 2064-2065
 2065-2066
 2066-2067
 2067-2068
 2068-2069
 2069-2070
 2070-2071
 2071-2072
 2072-2073
 2073-2074
 2074-2075
 2075-2076
 2076-2077
 2077-2078
 2078-2079
 2079-2080
 2080-2081
 2081-2082
 2082-2083
 2083-2084
 2084-2085
 2085-2086
 2086-2087
 2087-2088
 2088-2089
 2089-2090
 2090-2091
 2091-2092
 2092-2093
 2093-2094
 2094-2095
 2095-2096
 2096-2097
 2097-2098
 2098-2099
 2099-2100
 2100-2101
 2101-2102
 2102-2103
 2103-2104
 2104-2105
 2105-2106
 2106-2107
 2107-2108
 2108-2109
 2109-2110
 2110-2111
 2111-2112
 2112-2113
 2113-2114
 2114-2115
 2115-2116
 2116-2117
 2117-2118
 2118-2119
 2119-2120
 2120-2121
 2121-2122
 2122-2123
 2123-2124
 2124-2125
 2125-2126
 2126-2127
 2127-2128
 2128-2129
 2129-2130
 2130-2131
 2131-2132
 2132-2133
 2133-2134
 2134-2135
 2135-2136
 2136-2137
 2137-2138
 2138-2139
 2139-2140
 2140-2141
 2141-2142
 2142-2143
 2143-2144
 2144-2145
 2145-2146
 2146-2147
 2147-2148
 2148-2149
 2149-2150
 2150-2151
 2151-2152
 2152-2153
 2153-2154
 2154-2155
 2155-2156
 2156-2157
 2157-2158
 2158-2159
 2159-2160
 2160-2161
 2161-2162
 2162-2163
 2163-2164
 2164-2165
 2165-2166
 2166-2167
 2167-2168
 2168-2169
 2169-2170
 2170-2171
 2171-2172
 2172-2173
 2173-2174
 2174-2175
 2175-2176
 2176-2177
 2177-2178
 2178-2179
 2179-2180
 2180-2181
 2181-2182
 2182-2183
 2183-2184
 2184-2185
 2185-2186
 2186-2187
 2187-2188
 2188-2189
 2189-2190
 2190-2191
 2191-2192
 2192-2193
 2193-2194
 2194-2195
 2195-2196
 2196-2197
 2197-2198
 2198-2199
 2199-2200
 2200-2201
 2201-2202
 2202-2203
 2203-2204
 2204-2205
 2205-2206
 2206-2207
 2207-2208
 2208-2209
 2209-2210
 2210-2211
 2211-2212
 2212-2213
 2213-2214
 2214-2215
 2215-2216
 2216-2217
 2217-2218
 2218-2219
 2219-2220
 2220-2221
 2221-2222
 2222-2223
 2223-2224
 2224-2225
 2225-2226
 2226-2227
 2227-2228
 2228-2229
 2229-2230
 2230-2231
 2231-2232
 2232-2233
 2233-2234
 2234-2235
 2235-2236
 2236-2237
 2237-2238
 2238-2239
 2239-2240
 2240-2241
 2241-2242
 2242-2243
 2243-2244
 2244-2245
 2245-2246
 2246-2247
 2247-2248
 2248-2249
 2249-2250
 2250-2251
 2251-2252
 2252-2253
 2253-2254
 2254-2255
 2255-2256
 2256-2257
 2257-2258
 2258-2259
 2259-2260
 2260-2261
 2261-2262
 2262-2263
 2263-2264
 2264-2265
 2265-2266
 2266-2267
 2267-2268
 2268-2269
 226

TITLE: LINEAR LOW DENSITY POLYETHYLENES WITH HIGH MELT STRENGTH AND HIGH MELT INDEX RATIO

Natalie Ann Merrill
6C Flemington Gardens
Flemington, New Jersey 08822
Citizenship: United States of America

CORRESPONDENCE ADDRESS: Osborne K. McKenzie
Univation Technologies, LLC
5555 San Felipe, Suite 1950
Houston, Texas 77056
Phone: (713) 892-3711
Facsimile: (713) 892-3687

LINEAR LOW DENSITY POLYETHYLENES WITH HIGH MELT STRENGTH AND HIGH MELT INDEX RATIO

CROSS-REFERENCE TO RELATED APPLICATIONS

- 5 [001] The present is a Continuation-In-Part of U.S. Application Serial No. 09/680,644, filed October 6, 2000, 1998, which is incorporated herein in its entirety by reference.

FIELD OF THE INVENTION


- 10 [002] Embodiments of the present invention relate generally to linear low density polyethylenes having a high melt index (MI), high melt index ratio (MIR) and a high melt strength (MS). These polyethylenes may be produced in a gas phase process utilizing a blend of supported metallocene catalysts.

BACKGROUND OF THE INVENTION


- 15 [003] Since the advent of Linear Low Density Polyethylene (LLDPE), these linear polymers have benefited their users with physical and mechanical properties suitable for applications such as molded parts, foams, and films.
- [004] All conventional linear polymers have drawbacks that in melt processing, especially for film production, can hamper their utilization. These drawbacks are: (1) general lack of melt strength, which may manifest itself in bubble instability during film blowing process or in surging and edge weave in cast films; and (2) a low or flat response of viscosity to shear; this latter may manifest itself in higher melt viscosity leading to undesirable higher motor loads and torque requirements for extruders.
- 20 [005] To mitigate these drawbacks, processors have for decades, resorted to blending in branched polymers such as conventional, high-pressure process produced low density polyethylene (LDPE), into the LLDPE. However, such post-reactor additions can add to the cost as well as diminish some of the very desirable physical property improvements associated with LLDPE such as its toughness properties.
- 25 [006] There is a commercial need therefore for a LLDPE that will have improved melt strength and improved shear thinning in response to applied shear while maintaining the important physical and mechanical properties.
- 30 [007] We have discovered that a substantially non-blended LLDPE having relatively narrow molecular weight distribution, can have high melt strength, generally conferring good bubble stability during the melt processing of these polyethylenes in blown film

processes, high melt index (MI), and high MIR, generally indicative of a relatively high degree of shear thinning, both parameters indicating directionally improved processability.

[008] This substantially non-blended LLDPE may be made by a gas phase polymerization of ethylene and an α -olefin. The polymerization may be catalyzed by a supported metallocene catalyst combination. The supported catalyst will include metallocenes according to the following structures:

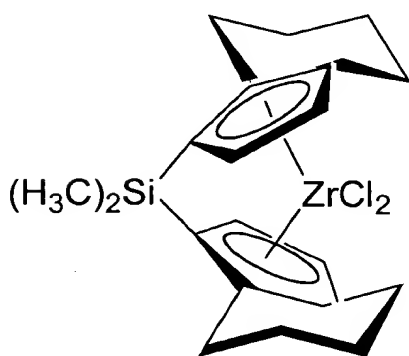

a

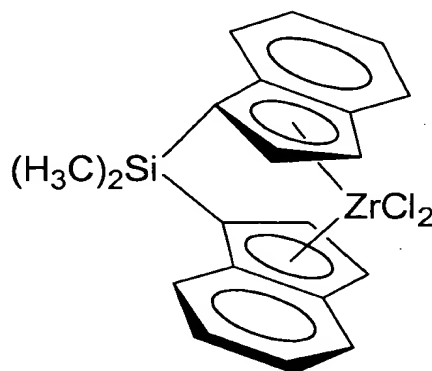

b

The indenyl or the tetrahydroindenyl (THI) rings may be substituted. The substituents may be linear or branched alkyl groups one to twenty carbons long, siloxy and its derivatives, phenyl and its derivatives, or any substituents group that gives an active catalyst system.

[009] The two metallocene components may be placed on separate supports and separately injected into the reactor or, alternately, they may be "co-fed" (that is, the two separately supported metallocene components are introduced into the reactor(s) as a mixture or blend) or the two metallocene components may be "co-deposited" (that is, formed by each being placed on the same support). The support materials are inorganic silicas and inorganic oxide materials, which include those of Groups 2, 3, 4, 5, 13 or 14 metal oxides. In another embodiment, the catalyst support materials include silica, alumina, silica-alumina, and mixtures thereof. The carrier of the catalyst of this invention has a surface area in the range of from 10 - 700 m²/g, pore volume in the range of from 0.1 -4.0 cc/g and average particle size in the range of from 10-500 μ m. Other embodiments of our invention include the ratio of the two metallocenes **a:b** in the range of from 90:10 – 10:90

in a polymerization process. The catalyst system may be activated by any means known by those of skill in the art, such as by utilizing methylalumoxanes, aluminum alkyls, and mixtures thereof, non-coordinating anions, or mixed activators.

5 **Brief Description of the Drawings**

[010] Figure 1 shows GPC/DRI/MALLS of a polyethylene produced using mixed metallocene of embodiments of our invention, is compared with that of a or b alone, both relative to a linear standard, ECD-103 (available from ExxonMobil Chemical Co, Houston, TX).

[011] Figure 2 is a plot of melt strength as a function of MI for mixed metallocenes a) + b).

[012] Figure 3 is a plot of melt strength as a function of MIR for mixed metallocenes a) + b).

15 **DETAILED DESCRIPTION OF THE INVENTION**

Zirconocenes

[013] A broad range of zirconocenes is contemplated. Zirconocene **a** is a bridged metallocene having tetrahydroindenyl (THI) ligand system. Zirconocene **b** is similar to **a** except for the ligand system which consists of an indenyl ring system. Each or both metallocene component may be substituted. The substituents may independently be linear or branched alkyl groups from one to twenty carbons long, silicon-containing groups, halogenated hydrocarbyl substituents, phenyl and its derivatives, or any group containing nitrogen, phosphorous, boron, sulfur that produce an active catalyst system. Embodiments of our invention include a mixture of dimethylsilyl bis(tetrahydro-1-indenyl)zirconium dichloride and rac-dimethylsilyl bis(1-indenyl) zirconium dichloride.

Supports

[014] The zirconocenes are placed on a support. Supports may be organic or inorganic.

[015] Organic supports may be finely divided polymer particles, polyethylene and/or polystyrene, alternatively resinous support materials such as polystyrene or polystyrene divinyl benzene copolymers or polymeric compounds or mixtures thereof.

[016] Inorganic support may be one or more of silica, clays, or combinations thereof. For purposes of this patent specification the terms "carrier" or "support" are interchangeable and can be any support material, a porous support material; such as for example, talc, inorganic

oxides, inorganic chlorides, for example magnesium chloride, and resinous support materials such as polystyrene or polystyrene divinyl benzene copolymers or polymeric compounds or any other organic or inorganic support material and the like, or mixtures thereof.

5 [017] The support materials may be inorganic oxide materials, which include those of Groups 2, 3, 4, 5, 13 or 14 metal oxides. The catalyst support materials include silica, silicates (including zeolites), alumina, composite oxides, and mixtures thereof. Other inorganic oxides that may be employed either alone or in combination with the silica, include alumina or silica-alumina and magnesia, titania, zirconia, and the like.

10 [018] The carrier of the catalyst of this invention has a surface area in the range of from 10 - 700 m²/g, pore volume in the range of from 0.1 - 4.0 cc/g and average particle size in the range of from 10-500 μm. The surface area is in the range of from 50-500 m²/g, pore volume of from 0.5-3.5 cc/g and average particle size of from 20-200 μm. The surface area range is from 100-400 m²/g, pore volume from 0.8 - 3.0 cc/g and average particle size is 15 from 20-100 μm. The average pore size of the carrier of the invention typically has pore size in the range of from 10 - 1000Å, or 50 - 500Å, or 75 - 350Å.

[019] The zirconocenes may be both placed on a single support (co-deposited), or each zirconocene is separately placed on different support particles in two different operations. Support particles may have the same composition and particle size distribution or,

20 alternately, they may different compositions and/or particle size distributions.

[020] Separately supported **a)** and **b)** can be mixed (for example, by using a mixing device) prior to injection into the reactor ("premixed") or, alternately, they may be separately injected and mixed after entry into the reactor, or both techniques may be used. In an alternative embodiment, the catalysts, in an unsupported mode, may be mixed then 25 atomized into a reactor, or they may be separately atomized into a reactor.

Mixtures

[021] The ratio of **a)** to **b)** may be from 90:10 - 10:90; or 80:20 - 20:80; or 75:25 - 25:75; or 60:40 - 40:60; or 50:50.

30 [022] For purposes of this patent specification and appended claims, the terms "cocatalysts" and "activators" are used interchangeably and are defined to be any compound or component which can activate a metallocene compound as defined above, for example, a Lewis acid or a non-coordinating ionic activator or ionizing activator or any other compound that can convert a neutral metallocene catalyst component to an active 35 metallocene cation. It is within the scope of this invention to use alumoxane as an

activator, and/or to also use ionizing activators, neutral or ionic, such as tri(n-butyl)ammonium tetrakis(pentafluorophenyl) boron.

[023] There are a variety of methods for preparing alumoxane and modified alumoxanes, non-limiting examples of which are described in U.S. Patent Nos. 4,665,208; 4,952,540; 5,091,352; 5,206,199; 5,204,419; 4,874,734; 4,924,018; 4,908,463; 4,968,827; 5,308,815; 5,329,032; 5,248,801; 5,235,081; 5,157,137; 5,103,031; 5,391,793; 5,391,529 and EP-A-0 561 476; EP-B1-0 279 586; EP-A-0 594-218 and WO 94/10180, all of which are fully incorporated herein by reference.

[024] Ionizing compounds may contain an active proton, or some other cation associated with but not coordinated or only loosely coordinated to the remaining ion of the ionizing compound. Such compounds and the like are described in EP-A-0 570 982, EP-A-0 520 732, EP-A-0 495 375, EP-A-0 426 637, EP-A-0 500 944, EP-A-0 277 003 and EP-A-0 277 004, and U.S. Patent Nos. 5,153,157, 5,198,401, 5,066,741, 5,206,197, 5,241,025, 5,387,568 and 5,384,299 and U.S. Patent Application Serial No. 08/285,380, filed August 3, 1994 all incorporated herein by reference. Combinations of activators are also contemplated by the invention, for example, WO 94/07928 and WO 95/14044 and U.S. Patent Nos. 5,153,157 and 5,453,410 all of which are incorporated herein by reference.

Monomers

[025] In one embodiment, the invention is directed toward a polymerization process involving the polymerization of one or more of the monomer(s) including ethylene alone or in combination with one or more linear or branched monomer(s) having from 3 to 30 carbon atoms, or 3 to 12 carbon atoms, or 4 to 8 carbon atoms. The process is particularly well suited to the copolymerization reactions involving the polymerization of ethylene in combination with one or more of the monomers, for example alpha-olefin monomers of propylene, butene-1, pentene-1, 3- or 4-methylpentene-1, hexene-1, octene-1, decene-1, styrene and unsubstituted or substituted cyclic and polycyclic olefins such as cyclopentene, norbornenes and cyclohexene or a combination thereof. Other monomers for use with ethylene can include diolefins such as 1,4-hexadiene, 1,5-hexadiene, 1,7-octadiene, 1,9-decadiene, norbornadiene, and other unsaturated monomers. Higher alpha-olefins and polyenes or macromers (that is, reactive macro-monomers having vinyl terminated end chains) can be used also. The comonomer may be an alpha-olefin having from 3 to 15 carbon atoms, or 4 to 12 carbon atoms or 4 to 10 carbon atoms.

[026] In another embodiment ethylene is polymerized with at least two different comonomers to form a terpolymers and the like, the comonomers may be a combination of monomers, alpha-olefin monomers having 3 to 10 carbon atoms, or 3 to 8 carbon atoms, optionally with at least one diene monomer. The terpolymers include the combinations such as ethylene/butene-1/hexene-1, ethylene/propylene/butene-1, ethylene/propylene/hexene-1, ethylene/propylene/cyclic diolefins, including, but not limited to ethylene/propylene/norbornadiene, ethylene/propylene/1,9-decadiene and the like.

Polyethylenes

[027] The polyethylenes that may be produced from the mixed metallocenes discussed above have surprising and unexpected properties. These properties are more surprising when the two metallocenes are separately supported then mixed prior to catalyzing the reaction between ethylene and one or more α -olefins. These properties are even more surprising when the two metallocenes are codeposited onto a support prior to catalyzing the reaction between ethylene and one or more α -olefins. Among the surprising properties are melt strength and MIR.

[028] Catalyst component **a**), when activated with MAO in a gas phase reaction, delivers a melt strength/MIR balance of 4.2 cN/47 for a polymer having melt index (MI) of 0.58. Catalyst component **b**), when activated with MAO under the same polymerization condition, delivers a melt strength/MIR balance of 10.2 cN/115 for a polymer having MI of 0.25 (see Table 3).

[029] For a 50/50 co-deposited catalyst system (both **a**) and **b**) on the same support) the melt strength was 11.6 cN. See Table 2, Run # 014. However, as can be seen from the data in Table 2, the melt strength of a 50/50 catalyst mixture, separately supported **a**) and **b**) on different support particles, is over 18 cN, greater than expected from a linear combination of the two melt strengths. This enhancement is even more surprising when one considers the fact that the MI of the polymer using the latter technique was in the 1.07-1.50 range, much higher than the MI of the individual polymers. Generally, the higher the MI the lower the melt strength. The MIR of the sample was measured to be 74.4.

[030] Since LDPEs ("low density polyethylenes", for example, high pressure free-radical initiated long chain branched polyethylene homopolymer and ethylene/vinyl acetate copolymer) are typically blended with LLDPE to improve melt strength and viscosity response to shear (where the latter parameter is described by MIR), these blends are most

often in the 10-40% range of LDPE inclusion, more likely 20-30%. The LLDPEs of embodiments of our invention are substantially non-blended.

[031] By "substantially non-blended" or "substantially unblended", we intend that the LLDPEs of embodiments of our invention have less than 10 weight percent, or less than 5 weight percent, or less than 3 weight percent, or 0 weight percent of a separate, branched polymer, for example, LDPE.

[032] Usual processing aids and other additives are not included in this discussion of blend components. Such aids and additives include, but are not limited to anti-oxidants, anti-ozonants, processing aids, slip, anti-block, anti-fog, anti-stat, colorants and the like.

[033] The densities of the LLDPEs of embodiments of our invention will be 0.910 – 0.965 g/cm³ or 0.915 – 0.960 g/cm³, or 0.915 – 0.950 g/cm³, or 0.915 – 0.940 g/cm³, or 0.915 – 0.930 g/cm³.

[034] The melt indices of the LLDPEs of embodiments of our invention, as measured by ASTM D-1238 Condition E, will be in the range of from 0.15-15 dg/min, or 0.1-10 dg/min, or 0.1-5 dg/min, or 0.1-3 g/10 min.

[035] The melt index ratios (MIR, I_{21}/I_2), as defined by ASTM D-1238 Condition E will be in the range from 30-120, or 40-120, or 40-100, or 45-100, or 50-90, or 50-85, or 50-75. MIR in these ranges approximates that of film extrusion grade LDPE, and is indicative of viscosity reduction in response to shear. LLDPEs generally have a nearly flat or are unresponsive to shear in their viscosity. Due to a resistance to "shear thinning," LLDPEs are typically more difficult to process which is generally manifested as a higher more power requirement during melt extrusion.

[036] The melt strength of polymers of embodiments of our invention, as measured by the method described in the Experimental section, will be in the range of from 5-20, or 6-20, or 7-20, or 8-20, or 10-20 centiNewtons (cN). Again this range is descriptive of LDPE melt strength.

[037] The composition distribution breadth index (CDBI) of the LLDPEs of embodiments of our invention will be in the range of 60-80% or 60-78%. Measurement of CDBI is determined by the technique known as temperature rising elution fractionation (TREF) for isolating individual fractions of a copolymer sample. The technique is described in J. Poly. Sci. Phys. Ed., Vol. 20, Pg. 441 (1982) and U.S. Patent 5,008,204, both incorporated herein by reference. The CDBI should be >40 %, or >50 %, or >60 %.

[038] The molecular weight distribution (MWD), or polydispersity index (PDI) also characterized by M_w/M_n , of the LLDPEs of embodiments of our invention will be generally ≤ 4.5 , or ≤ 3.5 , or ≤ 2.5 .

[039] We believe that LLDPEs of embodiments of our invention will find application in films, molded articles such as packaging lids, thermoformed or foamed objects and the like.

Branching

[040] For the purposes of this invention, the amount of branching is determined using the weight average branching index g of the branched polyethylene. The branching index g is defined as:

$$g = [Rg]_{br}^2 / [Rg]_{lin}^2$$

[041] "Rg" stands for Radius of Gyration, and is measured using Multi-Angle Laser Light Scattering (MALLS) equipment. "[Rg]_{br}" is the Radius of Gyration for the branched polymer sample and "[Rg]_{lin}" is the Radius of Gyration for a linear polymer sample. It is well known in the art that as the g value decreases, branchiness increases.

[042] Long chain branching is inferred when the polymer radius of gyration deviates from that measured for a linear polymer. The average deviation level was calculated from gel permeation chromatography (GPC)/DRI/MALLS data using the procedure outlined below (DRI stands for Differential Refractive index detector, which detects mass of polymer passing through the GPC column). First, the GPC/DRI/MALLS data was used to obtain molecular weight averages (M_w/M_z) and polymer radius of gyration that gives absolute molecular weight. For polyethylene polymers, the MALLS measurement of Rg is particularly sensitive in the range from 100,000 gram/mole to about 2,000,000 gram/mole. For this reason, the data was then truncated outside this range.

[043] The GPC/DRI/MALLS of a polyethylene produced using the mixed metallocene of embodiments of our invention, is compared with that of **a** or **b** alone, both relative to a linear standard, ECD-103 (available from ExxonMobil Chemical Co, Houston, TX). This is shown in Figure 1. The dotted line on the top of each graph represents the theoretical g for a perfectly linear polymer. Any deviation from this line indicates branching, which typically increases with increasing molecular weight. In these examples, **a**) alone shows slight deviation from the $g = 1.0$ reference line, whereas **b**) alone and (**a** + **b** mixed) show

large deviations from the reference line. The weight-average, $\langle g \rangle_w$, and z-average, $\langle g \rangle_z$, g-values are shown in the table below. The surprising observation is that the g values seen in (a + b mixed) case is about 30 % more than one would expect from a simple additive effect.

5

	$\langle g \rangle_w$	$\langle g \rangle_z$
a alone	0.96	0.942
b alone	0.566	0.44
(a + b) mixed	0.687	0.652

[044] Also in Figure 1 are shown the variations in the Radii of Gyration for the three cases. The straight line drawn from the left bottom corner to the right top corner represents the Radius of gyration for an ideal linear chain. Any deviation from it indicates branching. The polymer produced from a) alone shows a slight but noticeable deviation from the linear standard, whereas the other two cases show large deviations. The surprising observation is that the Radius of Gyration pattern seen in (a) + b) mixed) case is quite similar to the case of b) alone, despite the fact that the mixed catalyst contains only half as much the b) component. The separately-supported mixed metallocene catalyst polymer shows much stronger deviation from the linear standard, indicating enrichment of the polymer with about twice as much branched species relative to a) or b) alone. The exact nature of these branched species at the high molecular weight tails, is not well known.

[045] Figure 2 is a plot of melt strength as a function of MI for mixed metallocenes a) + b). There are two sets of points in the mixed metallocene line: one is for (a) + b)) blend, which is in the range of 1-2 MI, the other is for (a + b) codeposited and is in the 2-5 MI range. For comparison, LDPE and linear LLDPE lines are also shown along with the performance of a blend of LLDPE and combs (statistical). The comb blends were described in WO 98/34985 (US Patent No. 6,114,475).

[046] Figure 3 is similar to Figure 2 except that the MI axis is replaced by MIR. The rectangular box represents typical LDPE polymer range and is intended for comparison purposes only. Notice that the (a) + b)) blend gives much higher MIR/melt-strength response than the (a) + b)) codeposited case.

Experimental

Laboratory Gas Phase Reactor:

[047] The polymers of embodiments were made in laboratory runs of gas phase ethylene and ethylene/butene utilizing a two-liter autoclave reactor, equipped with an anchor impeller and jacketed heating. Sodium chloride was used as a fluidized bed in the reactor and was removed by dissolution and often with subsequent reprecipitation of the polymer. The salt was prepared by dehydration at 450°C under nitrogen over several days. The reactor pressure was read in gauge pressure, rather than absolute, and was measured using a Sensotech pressure transducer.

Preparation of Supported Mixed Catalyst:

[048] Metallocenes were pre-contacted with methylalumoxane and supported on silica using a preparation method described in US Patent 5,863,853, incorporated herein by reference. The preparation was calculated such that the catalyst was deposited onto the support using just enough solvent to fill the support pores. By using this minimum wetting, drying times and the amount of solvent required were both reduced. The metallocene and methylalumoxane (MAO) were pre-contacted in toluene prior to introduction of the silica support material and mixing. Solvent removal by vacuum was continued to constant dryness (until no further weight loss occurred).

Supported Catalyst Preparation Example:

[049] Materials: Silica: MS948m, 1.6 mL/g pore volume, W. R. Grace, Davison Chemical Division, Baltimore, Maryland (Davison Chemical Co.) previously heated to 600°C under nitrogen. Dimethylsilylbis(tetrahydro-1-indenyl) zirconium dichloride was used as supplied by Albemarle, and rac-dimethylsilylbis(1-indenyl)zirconium dichloride as supplied by Boulder Scientific Corporation (BSC). Methylalumoxane as a thirty weight percent clear MAO solution in toluene was supplied by Ethyl Corporation, Baton Rouge, Louisiana.

[050] Dimethylsilylbis(tetrahydro-1-indenyl) zirconium dichloride (0.001 moles, formula weight (FW) 456.57, 0.45 g), and rac-dimethylsilylbis(1-indenyl)zirconium dichloride (BSC-326, 0.448 g, FW 448.57 g, 0.001 moles), totaling 0.90 g, 0.002 moles, for 0.18 g Zr; plus 38.7 g MAO (30% in toluene, which represents 11.6 g MAO at 58 g/mole, and 5.4 g Al), and 41.6 g of dry toluene were used for a typical preparation. The zirconium catalysts

at various weight/weight ratios were simultaneously dissolved in toluene, and then pre-contacted with MAO and let sit for 30 minutes to activate. 30 g silica were added and blended with a spatula. The solvent was evaporated *in vacuo*, and after reaching constant weight, a dry free-flowing supported catalyst powder was isolated.

5

Polymerization:

10 [051] Polymerization runs were performed in the above-described 2-liter autoclave reactor equipped with an anchor impeller, an external water jacket for temperature control, a regulated supply of dry nitrogen, ethylene or ethylene/butene mixture, and reactor ports for introduction of seed bed, scavenger, other comonomers, hydrogen, and supported catalyst. The reactor was dried and degassed at 140°C under nitrogen for a minimum of one hour prior to use. A typical run consisted of introducing 200g of dried sodium chloride and 0.2 mL of triethylaluminum (TEAL, 25 mole% in heptane) to the reactor and heating the reactor to 100°C. The reactor was then vented and 0.8 psi of nitrogen purged through.

15 After 5 minutes, the nitrogen and the reactor outlet were sealed off and the supported catalyst, 500 mg as prepared below, was pressured into the reactor under nitrogen. Then 40 psig of ethylene was pressured throughout the run. The polymerization reaction was limited to 60 minutes. Venting and rapid cooling of the system quenches the reaction. The catalyst was killed by air exposure and the reactor contents were poured into distilled water

20 to dissolve the seedbed. Polyethylene was recovered by filtration and rinsed by passing toluene, hexane and methanol at ambient temperature through a Buchner funnel containing the polymer.

Gas Phase Copolymerizations:

25 [052] The polymers of the invention were prepared in gas phase polymerization under standard conditions. Catalyst activity was defined as kilograms polymer produced (dry yield of isolated polymer product) per mole zirconocene per hour. Laboratory catalyst activity was expected to be lower than pilot scale measured activities, or productivities, due to thermodynamics of scale and the improvement in surface to volume ratio on the larger

30 scale. Molecular weight behavior was important for the definition of a catalyst and process for film-forming polyethylenes. First, the polymer must be of a reasonable molecular weight to process easily into films, and second, the long chain branching known to improve processability may be decreased for a given catalyst system in the presence of hydrogen.

Therefore, a system requiring minimal hydrogen to achieve molecular weights suitable for film applications may be desirable. The process conditions, as developed in earlier work, were run at commercially viable temperature and pressure.

Table 1: CATALYST COMPARISONS FOR LCB PE¹:

5 LABORATORY GAS PHASE REACTOR AT 85°C AND 100 PSI

Metallocene	Run Number	Monomer(s)	Mw, k	MWD	Activity	Pseudo R1
b)	7-080	C ₂	143	4.5	1434	
	8-079	C ₂ /C ₄	104	6.1	2087 ²	0.75
a)	11-115	C ₂	57	3.8	1305	
	12 126	C ₂ /C ₄	93	5.9	471	1.93

¹ Summary of Best Results over approximately 35 runs.

² Catalyst **b)** showed the highest activities for copolymerization.

10 **[053]** Melt strength (MS) was measured using a Goettfert Rheotens attached to an Instron capillary rheometer. For this test, polymer melt is extruded through a capillary with a radius of 0.007633 cm and an aspect ratio (capillary length/capillary radius) of 33.531 at a constant plunger velocity. Therefore, the polymer melt is subjected to a constant apparent wall shear rate. The extruded melt is subsequently stretched by a pair of serrated wheels

15 having radii of 1.91 cm at a distance (H) from the capillary exit. The rotational speed of the wheels is increased linearly with time while the draw down force (F) is monitored. Melt strength is reported as the draw down force (cN) when the strand breaks. The following conditions were used in the melt strength measurements: temperature = 190°C; plunger speed = 0.127 cm/s; wheel acceleration = 2.4 cm/s/s; capillary radius = 0.076327 cm;

20 capillary length = 2.5593 cm; barrel radius = 0.47625; and wheel radius = 1.91 cm.

Table 2: Supported MAO-Activated Gas Phase Catalyst Laboratory Runs†

Run#	Catalyst Amount, mg.	Temp. °C	Psi, Ethylene	Yield, grams	Act. kgP/ molM	NMR, wt%/m% butene	MI g/10min	MIR	MS, cN	Mn X1000	Mw X1000
014	500 codeposited	85	120 ¹	23	980	7.8/4.0	NA	NA	11.6	21	86
029	1000 codeposited	80	100 ¹	35	750	8.5/4.5	2.9	38.9	9.5	17	65
013	1000 codeposited	85	100 ¹	52	1140	8.7/4.5	4.0	35.5	8.6	17	66
034	1000 codeposited	90	100 ¹	18	410	8.0/4.2	NA	NA	10.8	13	82
102	500+500 blend	85	100	61	1326	NA	1.1	74.4	17.0	16	98
103	500+500 blend	85	100	64	1401	NA	1.2	52.0	14.0	19	89
104	500+500 blend	85	100	59	1297	NA	1.5	50.5	14.5	18	80
106	500+500 blend	85	100	34	740	9.3/4.9	NA	NA	18.1	16	70
107	250a+750b blend	85	100	44	960	9.2/4.8	NA	NA	6.3	15	62
113	750a+250b blend	85	100	45	990	NA	1.9	53.3	7.7	16	69
117	1000 codeposited	85	120	94	NA	NA	4.0	37.4	6.0	NA	NA
120	1000 codeposited	90	100	33	NA	NA	2.6	35.2	11.0	NA	NA
122	1000 codeposited	85	100	79	NA	NA	5.4	34.1	4.0	NA	NA

NA = not available

† a + b supported as given in the experimental section, unless otherwise noted.

¹ Ethylene gas purchased as a 95:5 mole percent ethylene:butene mix at 200 psi, for semi-continuous gas phase feed.

Table 3: PILOT PLANT RUNS

Metallocene	a alone	b alone	a + b
			codeposited
Melt Index	0.58	0.25	0.73
MIR	47	115	61
MS cN	4.2	10.2	7.8
MWD	3.6	3.8	3.7

Although the present invention has been described in considerable detail with reference to certain versions thereof, other versions are possible. For example, while
5 metallocene catalysts are exemplified, any catalyst or catalyst system that produces polymers having a relatively high MIR and a relatively high melt strength are also contemplated.